

FMD500A FM DIPOLE

FMD500A is a vertically polarised FM dipole for low to medium RF power applications in the VHF 88.7 to 108MHz band.

The FMD500A is constructed of high grade Aluminium, chromate treated, with 'O' ring seals making it robust for extended life in harsh conditions. External parts are D.C. grounded for lightning protection.

The dipole is supplied as a single antenna or in combination fo 2, 4, 6 or 8 vertical stacks with the appropriate power splitters and mounting hardware.

Refer to the splitter and mounting hardware on the rear page.

FMD500A DIPOLE SPECIFICATIONS

DIPOLE SPECIFICATIONS

Average Gain 0dBd(2.14dBi)

Horizontal Beamwidth 196°
Vertical Beamwidth 70°
VSWR <1.25
Polarisation Vertical
Rated Power 1kW
Impedance 50 Ohms

Connector 7/16" DIN female 87-108MHz

Dimensions 1350 x 1050 x 50mm

Weight 5.5kg Wind Load (160km/hr) 9kg


Mounting Fixed Bracket 50mm /u-Bolt Material Aluminium (chromate treated,

Teflon spacers

ANTENNA SYSTEMS

No. dipoles Vertically Stacked	Gain (dBd)	vertical aperture (meters)
2	3	4.05
3	4.5	6.2
4	6	9.45
6	8.2	14.85
8	9.5	20.25



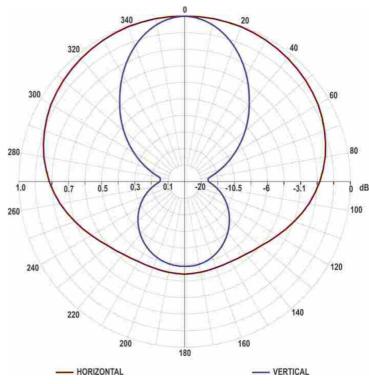

P.T.O. SPLITTER AND MOUNTING EQUIPMENT

POWER SPLITTER AND MOUNTING EQUIPMENT

